


Specifications

Wind-Free™ Avant

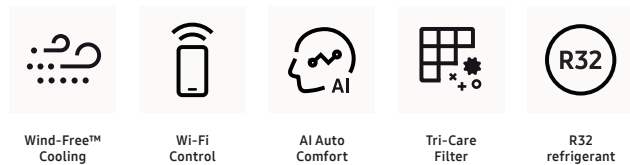

Indoor Unit		AR09TXEAAWKNEU	AR12TXEAAWKNEU	AR18TXEAAWKNEU	AR24TXEAAWKNEU	
Outdoor Unit		AR09TXEAAWKXEU	AR12TXEAAWKXEU	AR18TXEAAWKXEU	AR24TXEAAWKXEU	
Capacity						
Capacity	Cooling (Nominal)	kW	2.5	3.5	5.0	6.5
	Cooling (Min–Max)	kW	1.0–3.4	1.0–4.0	1.6–6.7	1.4–7.6
	Heating @ +7 °C	kW	3.2	4.0	6.0	7.4
	Heating (Min–Max)	kW	0.72–5.00	0.74–5.50	1.30–8.00	1.20–9.70
	Heating @ -5 °C	kW	3.62	3.59	5.07	6.04
	Heating @ -10 °C	kW	3.37	3.33	4.70	5.65
	Heating @ -15 °C	kW	3.12	3.07	4.63	5.60
Performance						
Energy Efficiency Cooling	SEER ¹	W/W	7.9/ A++	7.3/ A++	6.8/ A++	6.4/ A++
	Power Consumption	kWh/a	111	168	257	355
	Pdesignc	kW	2.5	3.5	5.0	6.5
	EER	W/W	4.39	3.76	3.60	3.33
Energy Efficiency Heating	SCOP ¹	W/W	4.6/ A++	4.6/ A++	4.1/ A+	4.0/ A+
	Power Consumption	kWh/a	670	730	1,298	1,435
	Pdesignh (average)	kW	2.2	2.4	3.8	4.1
	COP ¹	W/W	4.21	3.74	3.53	3.15
Moisture Removal		l/h	1.0	1.5	2.0	2.5
Maximum Airflow (Cooling)	Indoor Unit	m ³ /min	9.5	10.5	15.7	17.6
	Outdoor Unit	m ³ /min	45.0	45.0	50.0	50.0
Sound Power	Indoor Unit (Cooling)	dB(A)	57	57	58	62
	Outdoor Unit (Cooling)	dB(A)	59	62	65	68
Sound Pressure	Indoor Unit High/Silent Mode	dB(A)	38/16	40/16	41/25	45/26
	Outdoor Unit High	dB(A)	45	46	51	54
Operating Temperature Range	Cooling	°C	-10–46	-10–46	-10–46	-10–46
	Heating	°C	-15–24	-15–24	-15–24	-15–24
Electrical Data						
Power Source		Φ, V, Hz	1Φ, 220–240 V, 50 Hz	1Φ, 220–240 V, 50 Hz	1Φ, 220–240 V, 50 Hz	1Φ, 220–240 V, 50 Hz
Compressor Type	Outdoor Unit	Type	BLDC Rotary	BLDC Rotary	BLDC Rotary	BLDC Rotary
Power Consumption	Cooling	W	570	930	1,390	1,950
	Heating	W	760	1,070	1,700	2,350
Operating Current	Cooling	A	3.4	4.5	6.4	8.8
	Heating	A	3.7	5.1	7.8	10.5
Dimensions						
Net Dimensions (W x H x D)	Indoor Unit	mm	889 x 299 x 215	889 x 299 x 215	1,055 x 299 x 215	1,055 x 299 x 215
	Outdoor Unit	mm	790 x 548 x 285	790 x 548 x 285	880 x 638 x 310	880 x 638 x 310
Net Weight	Indoor Unit	kg	9.9	9.9	12.2	12.5
	Outdoor Unit	kg	29.9	29.9	39.7	43.7
Refrigerant						
Refrigerant	Type		R32 (contains fluorinated greenhouse gases. GWP = 675)			
	Charging (for 5 m)	kg	0.94	0.94	1.30	1.30
	Charging Ton Equivalent CO ₂	tCO ₂ e	0.63	0.63	0.88	0.88
	Additional Refrigerant Charging	g/m	15	15	15	15
Piping Connections	Liquid Pipe	ø, mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
	Gas Pipe	ø, mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.20 (3/8)
Piping Length	Min/Max (ODU to IDU)	m	3/15	3/15	3/30	3/30
Piping Height	Max	m	8	8	15	15
Piping Connections	Drain Pipe	ø, mm	ø16.3, 550 mm	ø16.3, 550 mm	ø16.3, 550 mm	ø16.3, 550 mm

Accessory



Wireless Remote Controller (included)

¹ Energy labels as shown are according to EU No 626/2011 (LOT10) label classification 2019, on a scale from D to A+++.